

Trasformatori da 3VA C.S. a vista

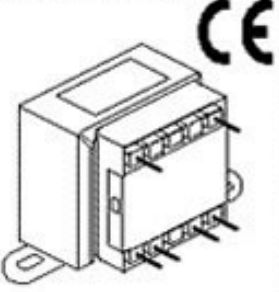
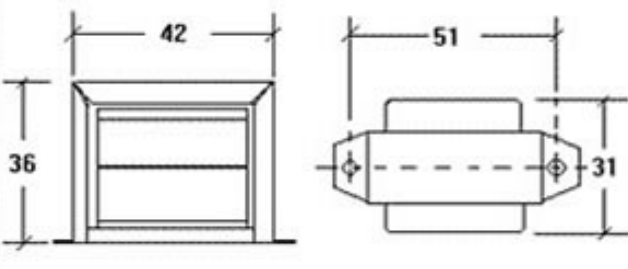

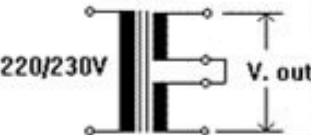


Transformers 3VA C.S.

Trasformatori di alimentazione per elettronica. Primario 220Vac. Due secondari uguali che si possono collegare in serie od in parallelo. In serie si raddoppia la tensione con la possibilità di avere anche lo zero centrale, (es. 12-0-12V).

In questo caso il trasformatore fornisce la corrente di un avvolgimento.

Nel collegamento in parallelo si raddoppia la corrente e rimane invariata la tensione.

Power transformers for electronics. Primary 220Vac. Two secondary equal that can be connected in series or parallel. In series doubles the voltage with the possibility of having also the central zero, (eg 12-0-12V). In this case the transformer supplying the current of a winding. In parallel connection doubles the current and the voltage remains unchanged.

			FORATURA C.S. PERFORATION P.C. 	
POTENZA POWER 3VA	SCHEMI DI COLLEGAMENTO - CONNECTION SCHEME			
VOLT-CODICI VOLT-CODE	SERIE MASS 	PARALLELO PARALLEL 	ZERO CENTRALE CENTRAL ZERO 	
TENSIONI E CORRENTI MASSIME OTTENIBILI MAX GETTABLE CURRENTS AND VOLTAGES				
4,5+4,5V COD.013375	9V 0,325A	4,5V 0,650A	4,5-0-4,5V 0,325+0,325A	
6+6V COD.012949	12V 0,250A	6V 0,500A	6-0-6V 0,250+0,250A	
7,5+7,5V COD.013376	15V 0,200A	7,5V 0,400A	7,5-0-7,5V 0,200+0,200A	
9+9V COD.012950	18V 0,150A	9V 0,300A	9-0-9V 0,150+0,150V	
12+12V COD.012951	24V 0,125A	12V 0,250A	12-0-12V 0,125+0,125A	
15+15V COD.012952	30V 0,100A	15V 0,200A	15-0-15V 0,100+0,100A	
18+18V COD.012953	36V 0,080A	18V 0,160A	18-0-18V 0,080+0,080A	
24+24V COD.016658	48V 0,060A	24V 0,120A	24-0-24V 0,060+0,060A	