

Trasformatori da 6VA C.S. a vista

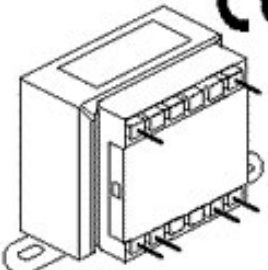
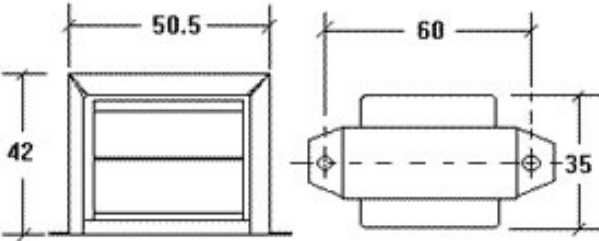

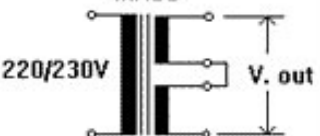
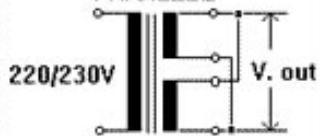
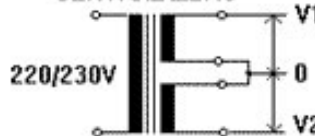
Transformers 6VA C.S.

Trasformatori di alimentazione per elettronica. Primario 220Vac. Due secondari uguali che si possono collegare in serie od in parallelo. In serie si raddoppia la tensione con la possibilità di avere anche lo zero centrale, (es. 12-0-12V).

In questo caso il trasformatore fornisce la corrente di un avvolgimento.

Nel collegamento in parallelo si raddoppia la corrente e rimane invariata la tensione.

Power transformers for electronics. Primary 220Vac. Two secondary equal that can be connected in series or parallel. In series doubles the voltage with the possibility of having also the central zero, (eg 12-0-12V). In this case the transformer supplying the current of a winding. In parallel connection doubles the current and the voltage remains unchanged.

			FORATURA C.S. PERFORATION P.C. 	
POTENZA POWER 6VA	SCHEMI DI COLLEGAMENTO - CONNECTION SCHEME			
VOLT-CODICI VOLT-CODE	SERIE MASS 	PARALLELO PARALLEL 	ZERO CENTRALE CENTRAL ZERO 	
TENSIONI E CORRENTI MASSIME OTTENIBILI MAX GETTABLE CURRENTS AND VOLTAGES				
4,5+4,5V COD.015353	9V 0,650A	4,5V 1,300A	4,5-0-4,5V 0,650+0,650A	
6+6V COD.012954	12V 0,500A	6V 1,000A	6-0-6V 0,500+0,500A	
7,5+7,5V COD.013834	15V 0,400A	7,5V 0,800A	7,5-0-7,5V 0,400+0,400A	
9+9V COD.012955	18V 0,300A	9V 0,600A	9-0-9V 0,300+0,300A	
12+12V COD.012956	24V 0,250A	12V 0,500A	12-0-12V 0,250+0,250A	
15+15V COD.012957	30V 0,200A	15V 0,400A	15-0-15V 0,200+0,200A	
18+18V COD.012958	36V 0,150A	18V 0,300A	18-0-18V 0,150+0,150A	
24+24V COD.014270	48V 0,125A	24V 0,250A	24-0-24V 0,125+0,125A	